

SINGLE STAGE DRY VANE ROTARY PUMPS

Our dry vane vacuum pumps are extremely compact and light thanks to the monoblock design, ensuring silent operation and vibration-free assembly. They can be supplied complete with suction filters and exhaust filter. A special vacuum-tight version is available for gas analyzers.

Applications:

Food industries, chemical, pharmaceutical, packaging & handling plastic, electrical industry, medical & other applications.




VD 16 - 25 - 40



VD 3 - 6 - 8

		VD 3	VD 6	VD 8	VD 16	VD 25	VD 40
Pumping speed*	m ³ /h	3	6	8	16	25	40
Ultimate pressure(abs.)	mbar	≤ 150	≤ 150	≤ 150	≤ 150	≤ 150	≤ 150
Motor power	kW	0,12	0,25	0,25	0,55	0,75	0,25
Motor speed	rpm	3000	3000	3000	1500	1500	1500
Dimensions	L x B x H (mm)	201x108x124	239x158x124	248x158x124	457x238x228	525x256x258	579x256x258
Weight	kg	4,9	7,2	7,7	25	33	36
Connections*	Inlet Outlet	1/8" Gas 1/8" Gas	3/8" Gas 3/8" Gas	3/8" Gas 3/8" Gas	1/2" Gas 1/2" Gas	3/4" Gas 3/4" Gas	3/4" Gas 3/4" Gas

*@50 Hz

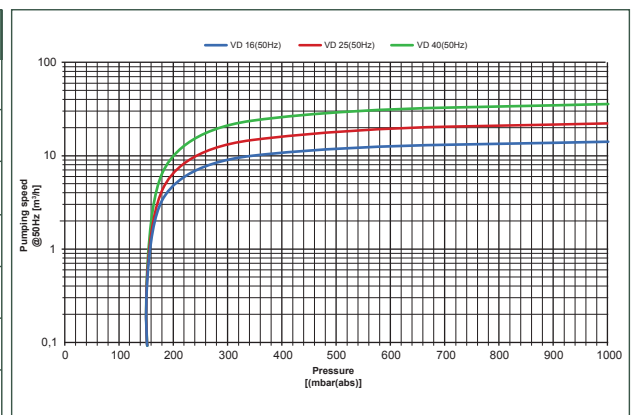

Toshniwal Instruments (Madras) Pvt. Ltd.

267, Kilpauk Garden Road, Chennai - 600 010, India / Tel: +91 44 26448983 / 8558

Email: sales@toshniwal.net / Web: www.toshniwal.net

Branches : Bangalore, Delhi, Hyderabad, Kolkata, Mumbai, Vadodara